



Quick Installation Guide



2-Port USB Cable KVM w/ Audio & Mic

USB-TA2

INTRODUCTION

The USB-TA2 is a 2-port USB Cable KVM Switch with two sets of fixed KVM cables and one QuickSwitch button for wired remote control. It provides audio and microphone switching function for uninterrupted multimedia experience.

It allows you to access, control, boot and reboot multiple multimedia computers using only one USB keyboard, mouse, monitor, a speaker set and microphone.

For computers running Windows/ Mac, it also provides an innovative and easy-to-use KVM Switching Software – a small Windows/Mac client application to facilitate your KVM switching operations such as computer selection, hotkey sequence programming, auto-scanning, auto-scanning delay time programming, independent/ simultaneous audio & computer switching, etc.

The USB-TA2 USB Cable KVM Switch offers USB 2.0 interface technology for Plug-and-Play. In addition to connect to keyboard or mouse, those two USB 2.0 ports can also be connected to other high-speed USB devices. Users can enjoy maximum flexibility by its compact and one-piece integrated-all design.

INSTALLATION

Take the Support CDROM and the Cable KVM Switch out of the box and follow the steps to install.


Step 1. Insert the Support CD ROM.

Step 2. For Windows: Right-click the “USB KVM Switching Software Installation CD” to start.

For Mac: copy the *.pkg file to a local disk and follow the instruction to complete.



Step 3. Connect a set of fixed KVM/ Audio & Microphone cables to Computer 1 and another set to Computer 2. Now start to operate.

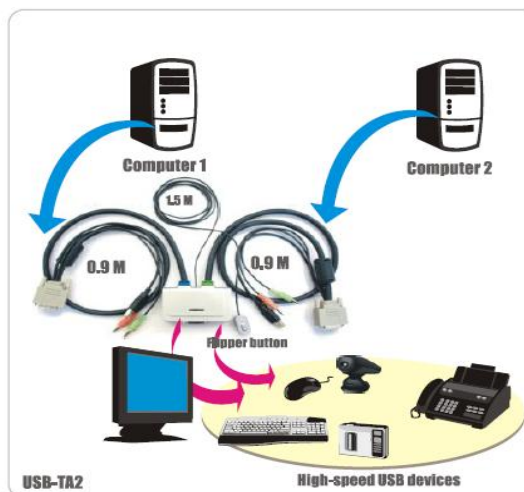

OPERATION

Three methods to control:

1. QuickSwitch button (a wired remote control)

The QuickSwitch button is a wired remote control that allows a direct switching control. Simply press the button and switch between two computers.

2. Keyboard hotkeys

Universal hotkey sequence = ScrLk + ScrLk or NmLk + NmLk

3. KVM Switching Software (Windows & Mac platform)

For more advanced functions, see description below.


KVM SWITCHING SOFTWARE OPERATION

Switch to Computer PC# by Operation Menu


1. Right-click the KVM Switching Software icon to evoke the operation menu.
2. Select the option in the Operation Menu accordingly.



Windows : Operation Menu

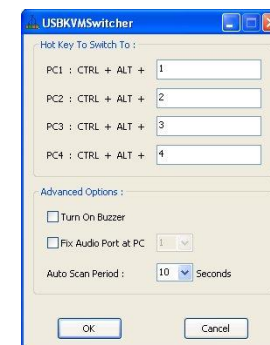

Configuration Dialog Box

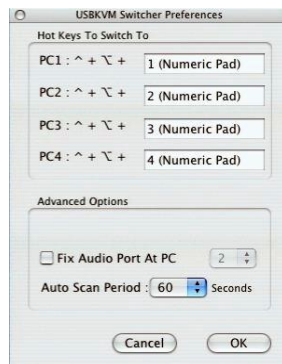

Mac OS: Operation Menu

Configuration Dialog Box

Switch to computer PC# by Keyboard Hotkeys

Hit the hotkey according to your current hotkey definition. Each keystroke within a hotkey sequence should be pressed for 2 seconds so the hotkey sequence can be validated.

Start Auto-scan

Right-click the KVM switching software icon to evoke the operation menu and select Start Auto-Scan to activate auto-scanning.

Stop Auto-scan

While auto-scanning, click the KVM switching software icon to evoke the operation menu and then select Stop Auto-Scan to deactivate auto-scanning.

KVM Switching Software Configuration

Right-click the KVM switching software icon and select Settings or double-click the icon to bring up the configuration dialog box.

Fix Audio Port at Computer PC#

Check this option and then select the computer to fix the audio/mic channel to the selected computer. Once this option is checked, the audio/mic channel will be fixed and become non-switchable.

Auto Scan Period

Select the Autoscan period from 10 ~ 60 seconds with an increment of 5 seconds. The Autoscan period is the time your KVM Switch will wait to switch to next computer.

-----This Page Intentionally Left Blank-----

